


Angled

FLAMSKYDD: SS-EN 1101
BREDD: 150 cm
MATERIAL: 100 % polyester
(flamsäker)
VIKT: 525 g/m²
KRYMPNING: 2 %
FÄRGHÄRDIGHET:
 mot ljus enligt
 SS-EN ISO 105-B02 5-7 (Skala 1-8)
 mot tvätt enligt
 SS-EN ISO 105-C06 4-5 (Skala 1-5)



LJUDABSORBERING

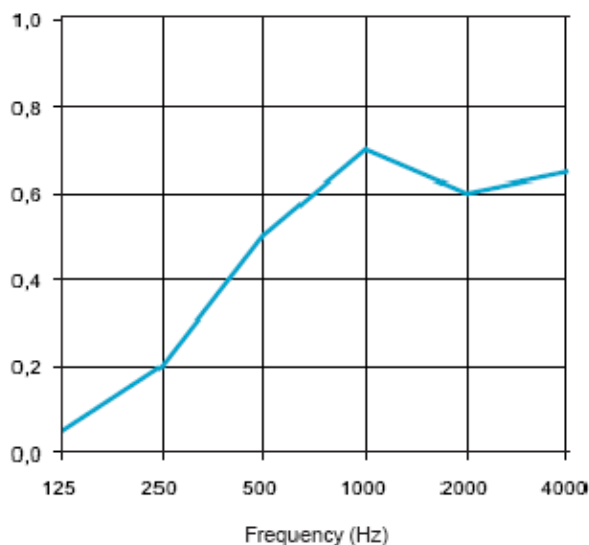

Frequency, Hz	Practical absorption factor, α_p
125	0,05
250	0,20
500	0,50
1000	0,70
2000	0,60
4000	0,65

ABSORPTION CLASS: D
 α_p 0,5 (H)*
 FLOW RESISTANCE: 40 Pa x s/m

* (H) indicates good absorption in the high frequency range

SKÖTSELANVISNING:

