


STILL

FLAMSKYDD:	SS-EN 1101
BREDD:	150 cm
MATERIAL:	100 % polyester (flamsäker)
VIKT:	580 g/m ²
KRYMPNING:	2 %
FÄRGHÄRDIGHET:	mot ljus enligt
SS-EN ISO 105-B02	5-7 (Skala 1-8)
mot tvätt enligt	
SS-EN ISO 105-C06	4-5 (Skala 1-5)



LJUDABSORBERING

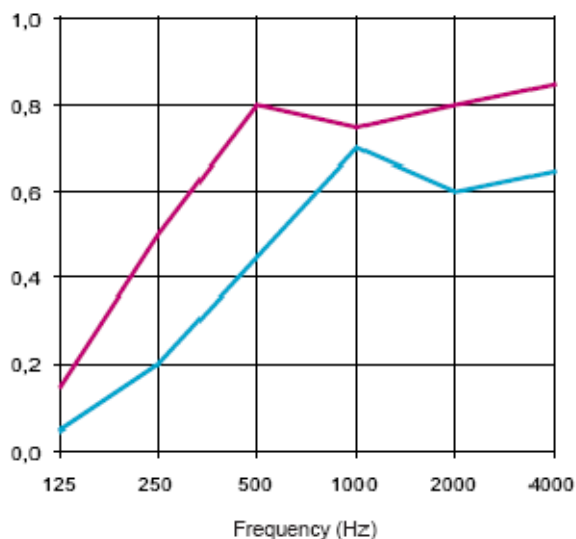

Frequency, Hz	Practical absorption factor, α_p	
	125	0,05
250	0,20	0,50
500	0,45	0,80
1000	0,70	0,75
2000	0,60	0,80
4000	0,65	0,85

ABSORPTION CLASS: **D** **C**
 α_w : 0,45 (M,H)* 0,75
 FLOW RESISTANCE: 36 Pa x s/m

* (M,H) indicates good absorption in the medium and high frequency range

SKÖTSELANVISNING:

